



# RIGA S1300 DALI 220V

ver. 20200404\_Rev\_0

year: 2015  
code: 1220301E10000  
type: hanging lamp  
application: indoor

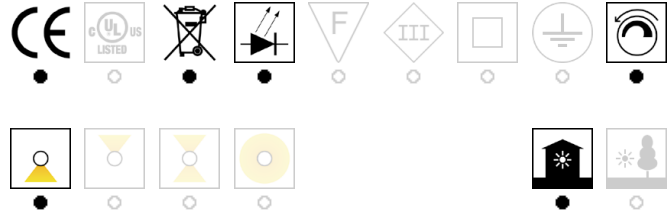

**Technical drawing**  
Size ref. image mm - inch

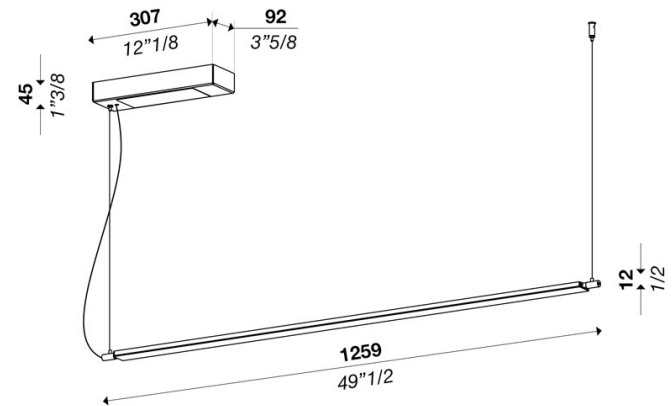

**Technical data**

|  |                          |
|--|--------------------------|
| Light source                                   | LED                      |
| Circuit structure                              | LED module               |
| Light emission direction                       | adjustable task lighting |
| Power  |                          |
| Source lumens                                  |                          |
| Source efficacy                                |                          |
| Consumption                                    |                          |
| Delivered lumens                               |                          |
| Luminaire efficacy                             |                          |
| Secondary                                      |                          |
| Colour temperature                             |                          |
| Colour rendering index                         |                          |
| Standard Deviation of Colour Matching          |                          |
| Energy class                                   |                          |
| Safety class                                   |                          |
| Degree of protection                           |                          |
| Direct mounting on normally flammable surfaces | ⊘                        |
| Operating temperature                          | +10° / +40°              |
| CE   | ●                        |
| UL   | ⊘                        |

**Optional**

|                |   |
|----------------|---|
| Emergency mode | ⊘ |
| Motion sensor  | ⊘ |
| Directional    | ● |

**Packing**

|             |  |
|-------------|--|
| Net weight  |  |
| Packaging 1 |  |
| Packaging 2 |  |
| Packaging 3 |  |
| Packaging 4 |  |
| Packaging 5 |  |

**Structure**

|          |                         |
|----------|-------------------------|
| Material | aluminium               |
| Finish   | white / variants page 2 |

**Diffuser**

|          |                        |
|----------|------------------------|
| Material | polycarbonate          |
| Finish   | opal / variants page 2 |

**Canopy**

|                |                                     |
|----------------|-------------------------------------|
| Diameter ( Ø ) | 307 x 92 mm - 12" 1/8 x 3" 5/8 inch |
| Height         | 45 mm - 1" 3/4 inch                 |
| Ceiling mount  | perpendicular / variants page 2     |

**Electronics / Driver**

|          |                   |
|----------|-------------------|
| Included | Yes               |
| Quantity | 1                 |
| Voltage  | 220-240V 50/60 Hz |

**Dimmable**



**Hanging cables**

|   |                   |
|---|-------------------|
| Stainless steel cables standard length (custom available) | 2000 mm / 78" 3/4 |
| Electric cable standard length (custom available)         | 2500 mm/100"      |

**Warranty**

|          |         |
|----------|---------|
| Duration | 2 years |
|----------|---------|








# RIGA S1300 DALI 220V

ver. 20200404\_Rev\_0

year: **2015**  
 code: **1220301E10000**  
 type: **hanging lamp**  
 application: **indoor**

Available versions








Colour temperature

|  |   |   |   |   |   |  |
|--|---|---|---|---|---|--|
| 2700K  | 3000K   | 3500K   | 4000K   | 5000K   | LED bulb  | custom   |
|  |  |  |  |  |  |  |
| <input type="radio"/>  | <input checked="" type="radio"/>  | <input type="radio"/>   | <input checked="" type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input type="radio"/>  |






Colour rendering index

|   |  |  |
|---|--|--|
|  |  |  |
| CRI 80  | CRI 90   | CRI 95   |
| <input checked="" type="radio"/>  | <input type="radio"/>  | <input type="radio"/>  |





Structure finish

|  |   |   |   |   |   |  |
|--|---|---|---|---|---|--|
| black  | white   | polished aluminium  | brass   | titanium  | wood  | custom   |
|  |  |  |  |  |  |  |
| <input checked="" type="radio"/>   | <input checked="" type="radio"/>  | <input type="radio"/>   | <input checked="" type="radio"/>  | <input type="radio"/>   | <input type="radio"/>   | <input checked="" type="radio"/>   |

Diffuser finish

|  |   |   |   |   |
|--|---|---|---|---|
| opal   | opal prismatic  | transparent   | transparent prismatic   | satin   |
|  |  |  |  |  |
| <input checked="" type="radio"/>   | <input type="radio"/>   | <input type="radio"/>   | <input checked="" type="radio"/>  | <input checked="" type="radio"/>  |

Ceiling mount

|   |   |   |   |
|---|---|---|---|
| direct  | perpendicular   | conical   | custom  |
|  |  |  |  |
| <input type="radio"/>   | <input checked="" type="radio"/>  | <input type="radio"/>   | <input checked="" type="radio"/>  |