



NOVA S350 ON-OFF 220V

ver. 20200404_Rev_0

year: 2015
code: 1690304E00000
type: hanging lamp
application: indoor

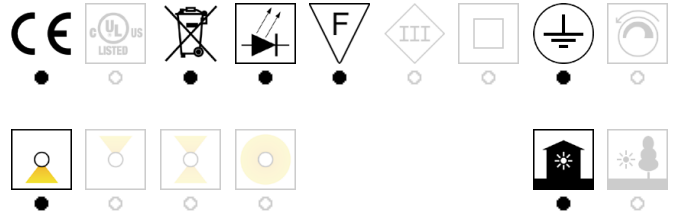

Technical drawing ref. image mm - inch

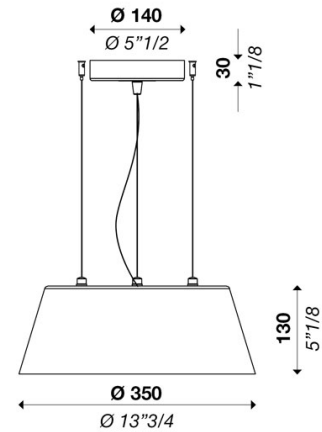

Technical data	
Light source	LED
Circuit structure	LED module vers.4
Light emission direction	downward
Power	21 W
Source lumens	3480 lm
Source efficacy	166 lm
Consumption	24 W
Delivered lumens	2210 lm
Luminaire efficacy	92 lm/W
Secondary	700mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
Optional	
Emergency mode	○
Motion sensor	○
Directional	○
Packing	
Net weight	
Packaging 1	L430 x W430 x H230 mm / 4.2 kg
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure	
Material	aluminium
Finish	white / variants page 2
Diffuser	
Material	pmma
Finish	opal / variants page 2
Canopy	
Diameter (Ø)	140 mm - 5" 1/2 inch
Height	30 mm - 1" 1/8 inch
Ceiling mount	perpendicular / variants page 2
Electronics / Driver	
Included	Yes
Quantity	1
Voltage	100-240V 50/60 Hz
Dimmable	
ON/OFF	PUSH
0-10V	1-10V
CUT PHASE	Bluetooth
DALI	
Hanging cables	
Stainless steel cables standard length (custom available)	2000 mm / 78" 3/4
Electric cable standard length (custom available)	2500 mm/100"
Warranty	
Duration	2 years







NOVA S350 ON-OFF 220V

ver. 20200404_Rev_0





year: **2015**
code: **1690304E00000**
type: **hanging lamp**
application: **indoor**

Available variants







Colour temperature

2700 k	3000 k	3500 k	4000 k	bulb	custom
					
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>






Colour rendering index

CRI 80	CRI 90	CRI 95	custom
			
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>






Structure finish

gold / brass	matt white	matt black	embossed white	embossed black	custom
					
<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>

Diffuser / Optical

opal	transparent	transparent prismatic	satin	custom
				
<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>

Ceiling Mount

direct	perpendicular	conical	remote driver	custom
				
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>