


# CONE S570 0\_1-10V 110V


ver. 20200404\_Rev\_0

year: 2015  
code: 1700303A20000  
type: hanging lamp  
application: indoor

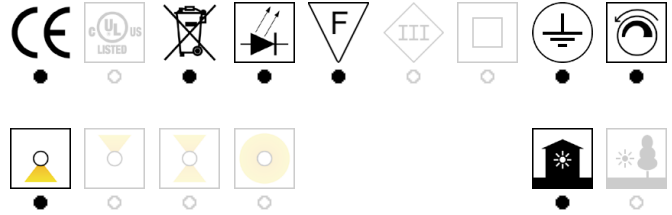

## Technical drawing

Size ref. image mm - inch

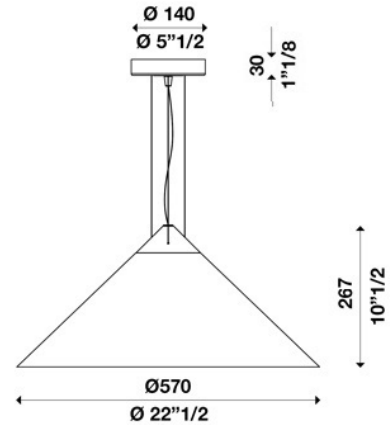

## Technical data

Light source	LED
Circuit structure	LED module G4
Light emission direction	downward
Power	41 W
Source lumens	7000 lm
Source efficacy	171 lm/W
Consumption	43 W
Delivered lumens	3849 lm
Luminaire efficacy	90 lm/W
Secondary	1200mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

## Optional

Emergency mode	○
Motion sensor	○
Directional	○

## Packing

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

## Structure

Material	aluminium
Finish	white / variants page 2

## Diffuser

Material	polycarbonate
Finish	opal / variants page 2


## Canopy

Diameter ( Ø )	140 mm - 5" 1/2 inch
Height	30 mm - 1" 1/8 inch
Ceiling mount	perpendicular / variants page 2

## Electronics / Driver

Included	Yes
Quantity	1
Voltage	100-240V 50/60 Hz

## Dimmable



## Hanging cables

Stainless steel cables standard length (custom available)	2000 mm / 78" 3/4
Electric cable standard length (custom available)	2500 mm/100"

## Warranty

Duration	2 years
----------	---------







# CONE S570 0\_1-10V 110V

ver. 20200404\_Rev\_0





year: **2015**  
code: **1700303A20000**  
type: **hanging lamp**  
application: **indoor**

## Available variants

### Colour temperature

2700 k	3000 k	3500 k	4000 k	bulb	custom
					
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>







### Colour rendering index

CRI 80	CRI 90	CRI 95	custom
			
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>






### Structure finish

gold / brass	champagne	gunmetal	beige	lead	naval brass	anodized brass	glossy night blue	sideral copper	blue 5020
									
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
matt white	matt black	embossed white	embossed black	titanium	manganese	ferrari red	mat blue	bronze	custom
									
<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>

### Diffuser / Optical

opal	opal prismatic	transparent	transparent prismatic	satin	custom
					
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>

### Ceiling Mount

direct	perpendicular	conical	remote driver	custom
				
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>