


PIN S160.5 DALI 220V


ver. 20200404_Rev_0

year: 2014
code: 1710335E10000
type: hanging lamp
application: indoor

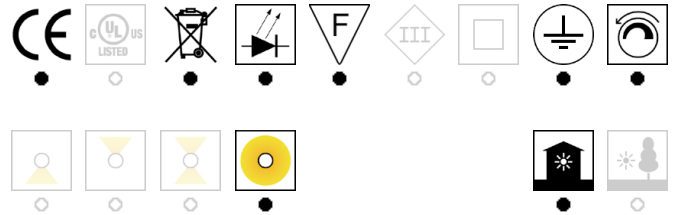

Technical drawing

Size ref. image mm - inch

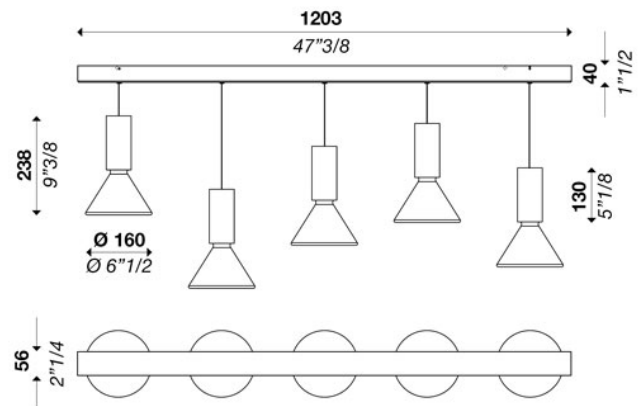

Technical data

Light source	LED
Circuit structure	LED COB G7
Light emission direction	diffused
Power	45 W
Source lumens	7030 lm
Source efficacy	156 lm/W
Energy class	A
Delivered lumens	4580 lm
Secondary	350mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

Optional

Emergency mode	○
Motion sensor	○
Directional	○

Packing

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure

Material	aluminium
Finish	white / variants page 2

Diffuser

Material	glass
Finish	white


Canopy

Size	1203 x 56 mm - 47" 3/8 x 2" 1/2 inch
Height	40 mm - 1" 1/2 inch
Ceiling mount	direct / variants page 2

Electronics / Driver

Included	Yes
Quantity	1
Voltage	100-277V 50/60 Hz

Dimmable



Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	2500 mm/100"

Warranty

Duration	2 years
----------	---------


PIN S160.5 DALI 220V

ver. 20200404_Rev_0


year: **2014**
code: **1710335E10000**
type: **hanging lamp**
application: **indoor**

Available variants


Colour temperature

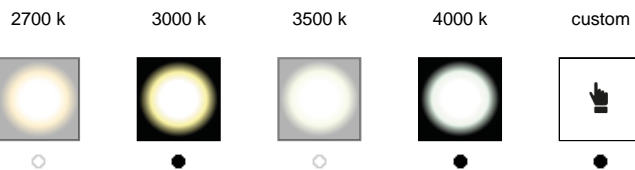


Colour rendering index

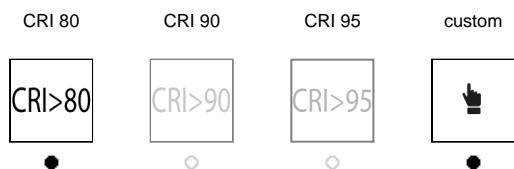

Structure finish

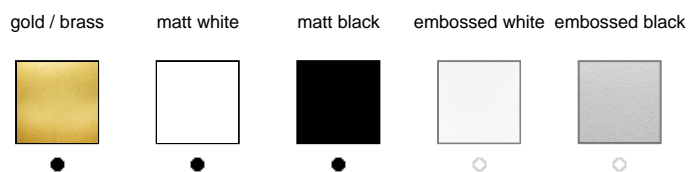

Diffuser / Optical

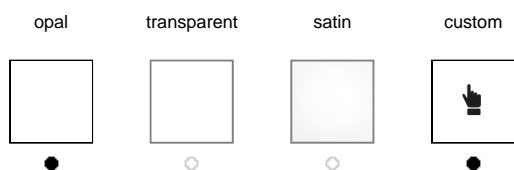

Ceiling Mount

