


# MONOCOLO C90 DALI 220V


ver. 20200404\_Rev\_0

year: 2018  
code: 2250210E10000  
type: ceiling lamp  
application: indoor

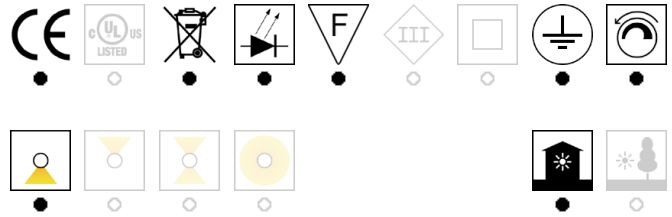

### Technical drawing

Size ref. image mm - inch

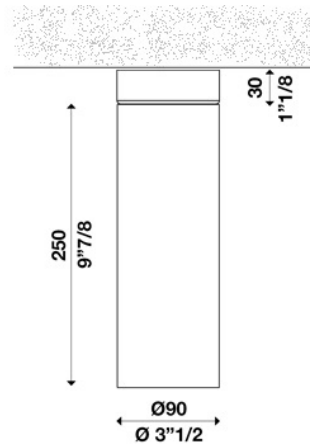

### Technical data

Light source	LED
Circuit structure	COB LED G7
Light emission direction	downward
Power	16 W
Source lumens	2914 lm
Source efficacy	187 lm/W
Consumption	19 W
Delivered lumens	1654 lm
Luminaire efficacy	86 lm/W
Secondary	500mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
<b>Optional</b>	
Emergency mode	○
Motion sensor	○
Directional	○

### Packing

Net weight	1.1 Kg
Packaging 1	Ø100 x 330 mm / 1.5 kg
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

### Structure

Material	aluminium
Finish	white / variants page 2

### Diffuser

Material	polycarbonate
Finish	opal / variants page 2

### Electronics / Driver

Included	Yes
Quantity	1
Voltage	220-240V 50/60 Hz

### Dimmable



### Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

### Warranty

Duration	2 years
----------	---------


# MONOCOLO C90 DALI 220V

ver. 20200404\_Rev\_0


year: **2018**  
 code: **2250210E10000**  
 type: **ceiling lamp**  
 application: **indoor**

## Available versions


### Colour temperature

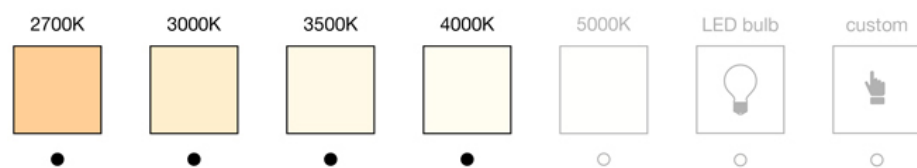

### Colour rendering index

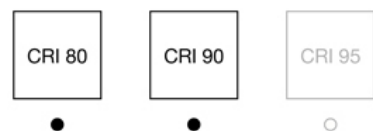

### Structure finish

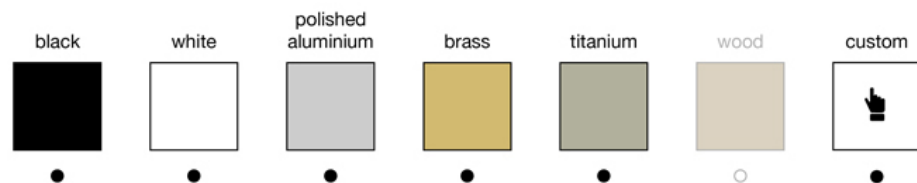

### Diffuser finish

