



MONOCOLO C90 DALI 220V

ver. 20200404_Rev_0

year: 2018
code: 2250210E10000
type: ceiling lamp
application: indoor

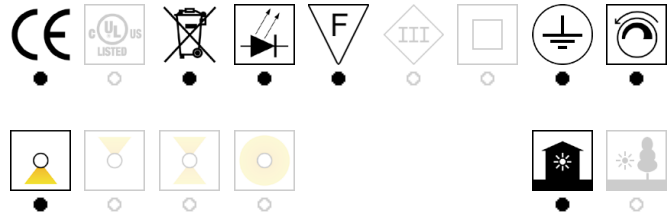

Technical drawing
Size ref. image mm - inch

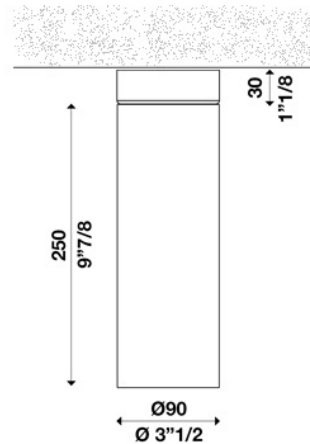

Technical data

Light source	LED
Circuit structure	COB LED G7
Light emission direction	downward
Power	16 W
Source lumens	2914 lm
Source efficacy	187 lm/W
Consumption	19 W
Delivered lumens	1654 lm
Luminaire efficacy	86 lm/W
Secondary	500mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

Optional	
Emergency mode	○
Motion sensor	○
Directional	○

Packing

Net weight	1.1 Kg
Packaging 1	Ø100 x 330 mm / 1.5 kg
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure

Material	aluminium
Finish	white / variants page 2

Diffuser

Material	polycarbonate
Finish	opal / variants page 2

Electronics / Driver

Included	Yes
Quantity	1
Voltage	220-240V 50/60 Hz

Dimmable



Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

Warranty

Duration	2 years
----------	---------


MONOCOLO C90 DALI 220V

ver. 20200404_Rev_0


year: **2018**
code: **2250210E10000**
type: **ceiling lamp**
application: **indoor**

Available variants


Colour temperature

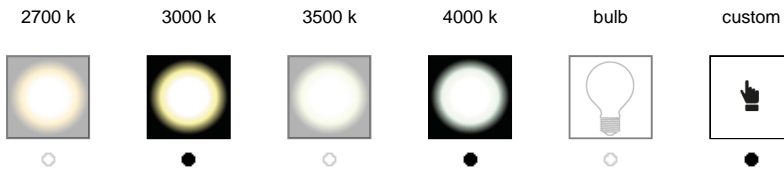


Colour rendering index

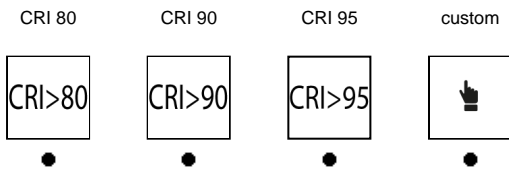

Structure finish

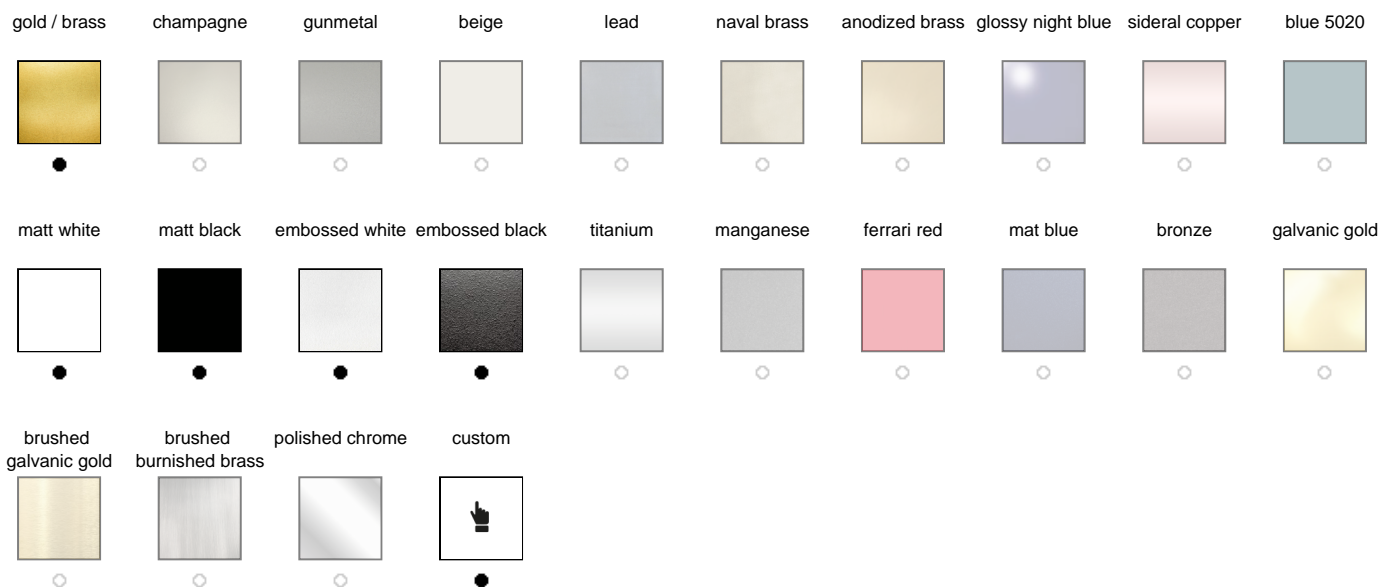

Diffuser / Optical

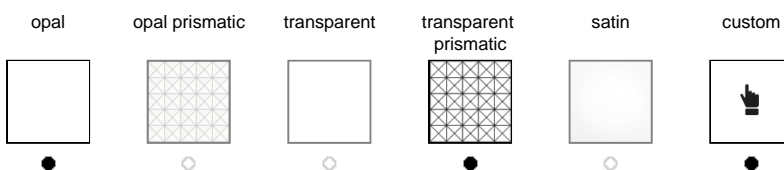

Ceiling Mount

direct



perpendicular



conical



remote driver



custom

