



# FLAT S500 0\_1-10V 100-240V

ver. 20200404\_Rev\_0

year: 2020  
code: 2520301U20000  
type: hanging lamp  
application: indoor

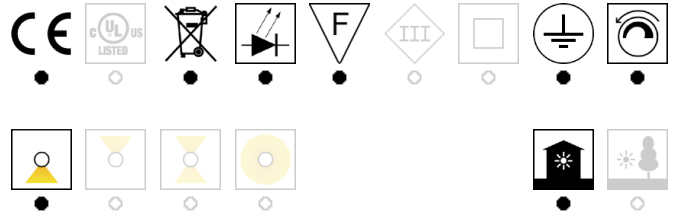

**Technical drawing**  
Size ref. image mm - inch

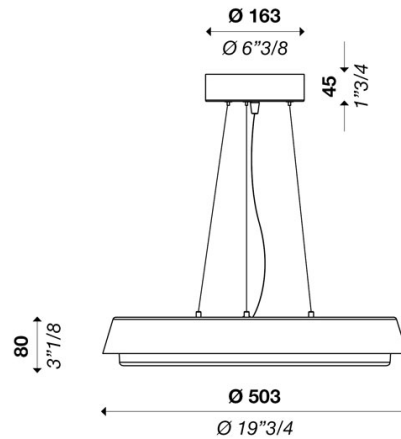

**Technical data**

Light source	LED
Circuit structure	LED module vers.4
Light emission direction	direct
Power	41 W
Source lumens	7000 lm
Source efficacy	171 lm/W
Consumption	48 W
Delivered lumens	5000 lm
Luminaire efficacy	104 lm/W
Secondary	1200mA
Colour temperature	3000 K / varianti pagina 2
Colour rendering index	80 CRI / varianti page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

**Optional**

Emergency mode	○
Motion sensor	○
Directional	○

**Packing**

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

**Structure**

Material	aluminium
Finish	white / variants page 2

**Diffuser**

Material	pmma
Finish	opal / variants page 2

**Canopy**

Diameter ( Ø )	163 mm - 6" 3/8 inch
Height	45 mm - 1" 3/4 inch
Ceiling mount	conical / variants page 2

**Electronics / Driver**

Included	Yes
Quantity	1
Voltage	100-240V 50/60 Hz

**Dimmable**



**Hanging cables**

Stainless steel cables standard length (custom available)	2000 mm / 78" 3/4
Electric cable standard length (custom available)	2500 mm/100"

**Warranty**

Duration	2 years
----------	---------


# FLAT S500 0\_1-10V 100-240V

ver. 20200404\_Rev\_0


year: **2020**  
code: **2520301U20000**  
type: **hanging lamp**  
application: **indoor**

## Available variants


### Colour temperature

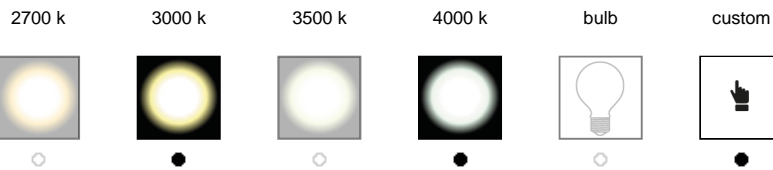


### Colour rendering index

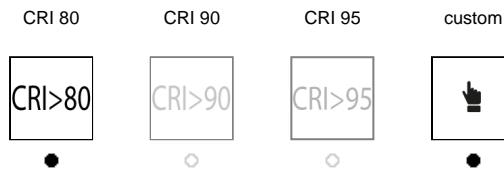

### Structure finish

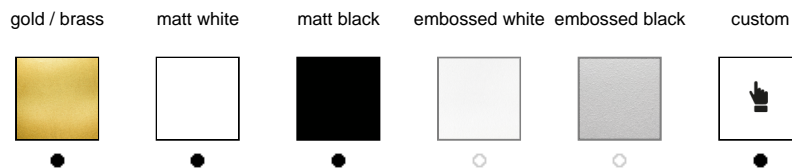

### Diffuser / Optical

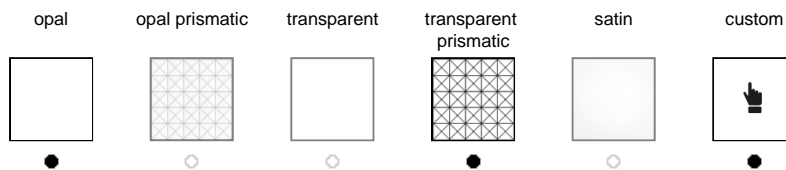

### Ceiling Mount

