


RITMO C1800 DALI 100-277V


ver. 20200911_Rev_0

year: 2020
code: 2570201S10100
type: ceiling lamp
application: indoor

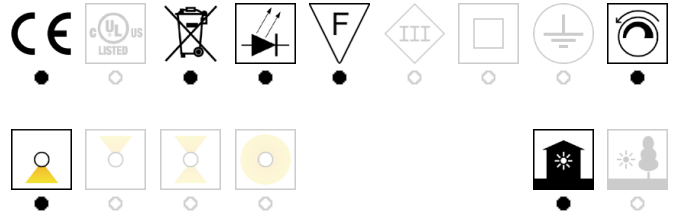

Technical drawing

Size ref. image mm - inch

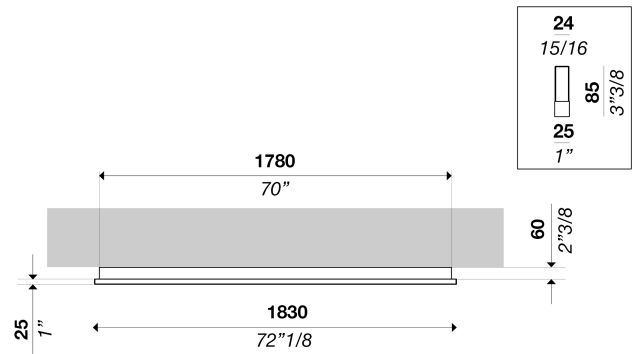

Technical data

Light source	LED
Circuit structure	LED strip
Light emission direction	direct
Power	43 W
Source lumens	6440 lm
Source efficacy	150 lm/W
Consumption	48 W
Delivered lumens	4400 lm
Luminaire efficacy	92 lm/W
Secondary	1000mA
Colour temperature	3000 K / varianti pagina 2
Colour rendering index	90 CRI / varianti pagina 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	D
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

Optional

Emergency mode	○
Motion sensor	○
Directional	○

Packing

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure

Material	aluminium
Finish	white / varianti page 2

Diffuser

Material	polycarbonate
Finish	opal / varianti page 2

Canopy

Diameter (Ø)	○
Height	○
Ceiling mount	direct

Electronics / Driver

Included	Yes
Quantity	1
Voltage	100-277V 50/60 Hz

Dimmable



Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

Warranty

Duration	2 years
----------	---------


RITMO C1800 DALI 100-277V

ver. 20200911_Rev_0


year: **2020**
code: **2570201S10100**
type: **ceiling lamp**
application: **indoor**

Available variants


Colour temperature

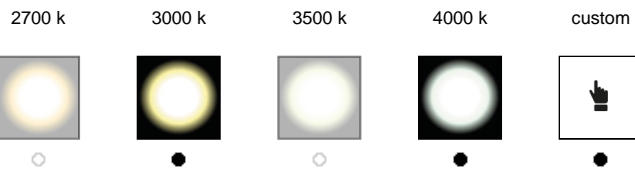

Colour rendering index

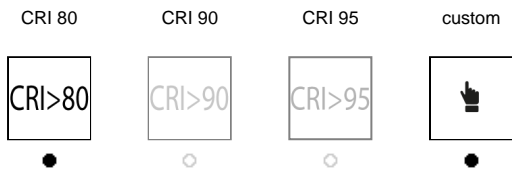

Structure finish

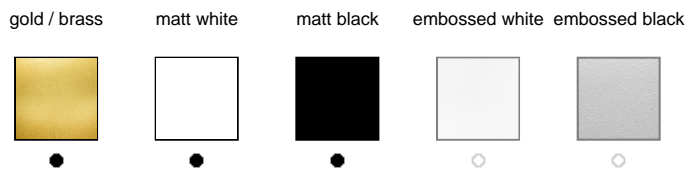

Diffuser / Optical

