



# LUNA W430 DALI 220V

ver. 20200404\_Rev\_0

year: **2022**  
code: **2670104E10100**  
type: **wall lamp**  
application: **indoor**

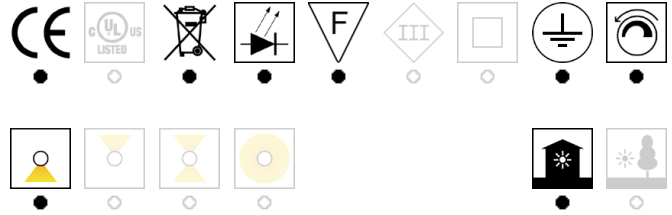

**Technical drawing**  
Size ref. image mm - inch

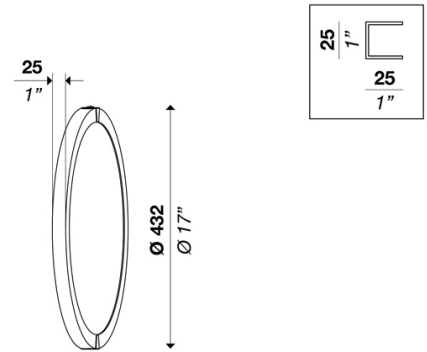

Technical data	
Light source	LED
Circuit structure	LED strip
Light emission direction	direct
Power	32 W
Source lumens	3648 lm
Source efficacy	114 lm/W
Energy class	F
Delivered lumens	2996 lm
Secondary	24 V
Colour temperature	3000 K / variants page 2
Colour rendering index	90 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

Optional	
Emergency mode	○
Motion sensor	○
Directional	○

Packing	
Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure	
Material	aluminium
Finish	white / variants page 2

Diffuser	
Material	polymer stretch
Finish	opal / variants page 2

Electronics / Driver	
Included	Yes
Quantity	1
Voltage	220-240V 50/60 Hz

Dimmable	
ON/OFF	○
PUSH	○
0-10V	○
1-10V	○
CUT PHASE	○
Bluetooth	○
DALI	●

Hanging cables	
Stainless steel cables standard length (custom available)	-
Electric cable standard length (custom available)	-

Warranty	
Duration	2 years


# LUNA W430 DALI 220V

ver. 20200404\_Rev\_0


year: **2022**  
code: **2670104E10100**  
type: **wall lamp**  
application: **indoor**

## Available variants


### Colour temperature

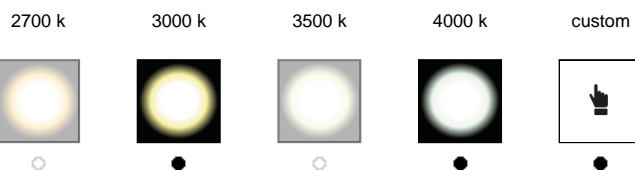


### Colour rendering index

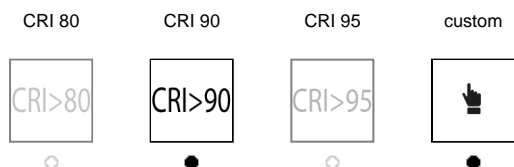

### Structure finish

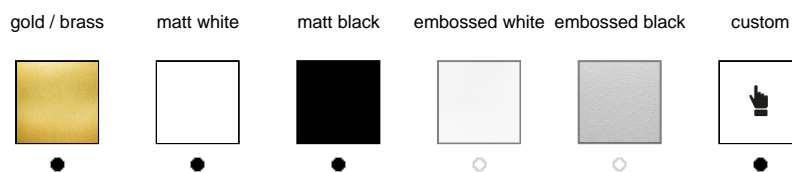

### Diffuser / Optical



### Ceiling Mount

