



LUNA S430 VERTICAL DALI 220V

ver. 20200404_Rev_0

year: **2021**
code: **2670303E10100**
type: **hanging lamp**
application: **indoor**

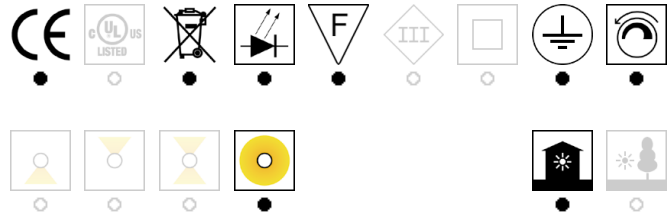

Technical drawing
Size ref. image mm - inch

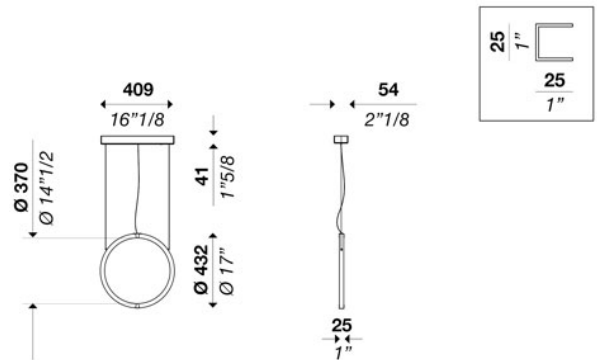

Technical data

Light source	LED
Circuit structure	LED strip
Light emission direction	diffused
Power	32 W
Source lumens	3648 lm
Source efficacy	114 lm/W
Energy class	F
Delivered lumens	2996 lm
Secondary	24 V
Colour temperature	3000 K / variants page 2
Colour rendering index	90 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

Optional

Emergency mode	○
Motion sensor	○
Directional	○

Packing

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure

Material	aluminium
Finish	white / variants page 2

Diffuser

Material	polymer stretch
Finish	opal / variants page 2

Electronics / Driver

Included	Yes
Quantity	1
Voltage	220-240V 50/60 Hz

Dimmable



Hanging cables

Stainless steel cables standard length (custom available)	2000 mm / 78" 3/4
Electric cable standard length (custom available)	2500 mm/100"

Warranty

Duration	2 years
----------	---------


LUNA S430 VERTICAL DALI 220V

ver. 20200404_Rev_0


year: **2021**
 code: **2670303E10100**
 type: **hanging lamp**
 application: **indoor**

Available variants


Colour temperature

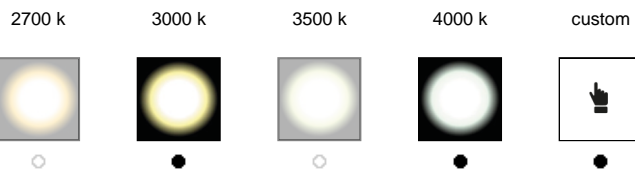


Colour rendering index

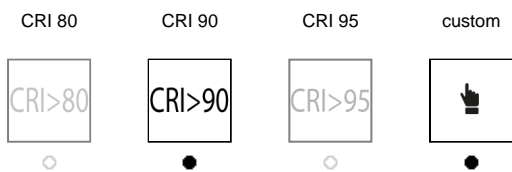

Structure finish

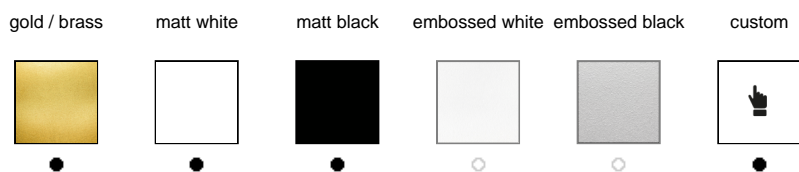

Diffuser / Optical



Ceiling Mount

